


# Hipy 110 round / square asy LED

123452XX\_123462XX\_

1

- A) Without conbox Ø100 H105
- B) With conbox round Ø100 H165
- C) With conbox square Ø100 H150

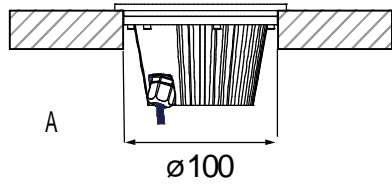

A

Ø100

Ø114

B

165


C

150

251

115

2



bruin-brown-brun-  
braun-moreno-  
bruno-коричневый


blauw-blue-bleu-blau-  
azul-azzurro-голубой

Wires not stripped !!

Led driver

350mA - min 16,5Vf - max 19,2Vf - 6,2W  
500mA - min 17,1Vf - max 19,8Vf - 9,2W  
700mA - min 17,7Vf - max 20,8Vf - 13,4W




ADVISED TO PUT  
THE DRIVER  
ON DISTANCE !!!!



OPEN


PUSH

CLOSED

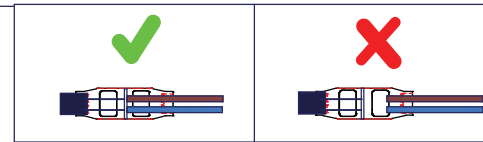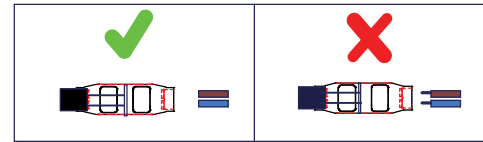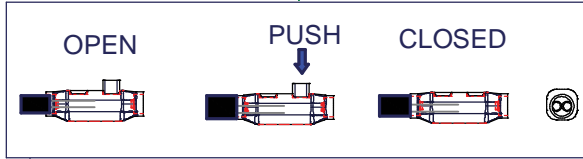


3


Max;Static load 5886 Newton (600kg)  
Max. surface temperature 60°C (140°F)

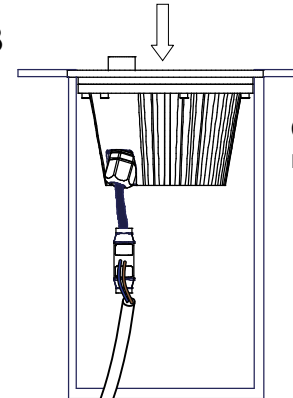


ADVISED TO PUT  
THE DRIVER  
ON DISTANCE !!!!




4

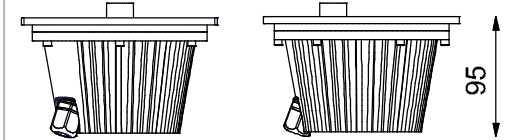

95



□110



Ø 110

Replace protective shield when broken.  
The luminaire shall only be used  
complete with its protective shield.  
Reference number: 1008025

CAN BE USED WITH

12349930 Conbox outer dimension 115x115x150x251  
12349830 Conbox outer dimension DIA 114x165

